

WIFI Camera - Operating Instructions

Thank you for purchasing this product, the machine uses a unique ultra-portable design, it can be applied in various fields, to bring you convenient, safe, colorful daily life, follow the steps in the instructions to set up your camera correctly.

Mobile APP:



Android



IOS

Camera connectors:




Remotely configurate wifi by Mobile phone APP

1. Connect the camera with power supply




2. Open XMEYE APP on your mobile phone

3. You can register the user name login, you can also use the local login

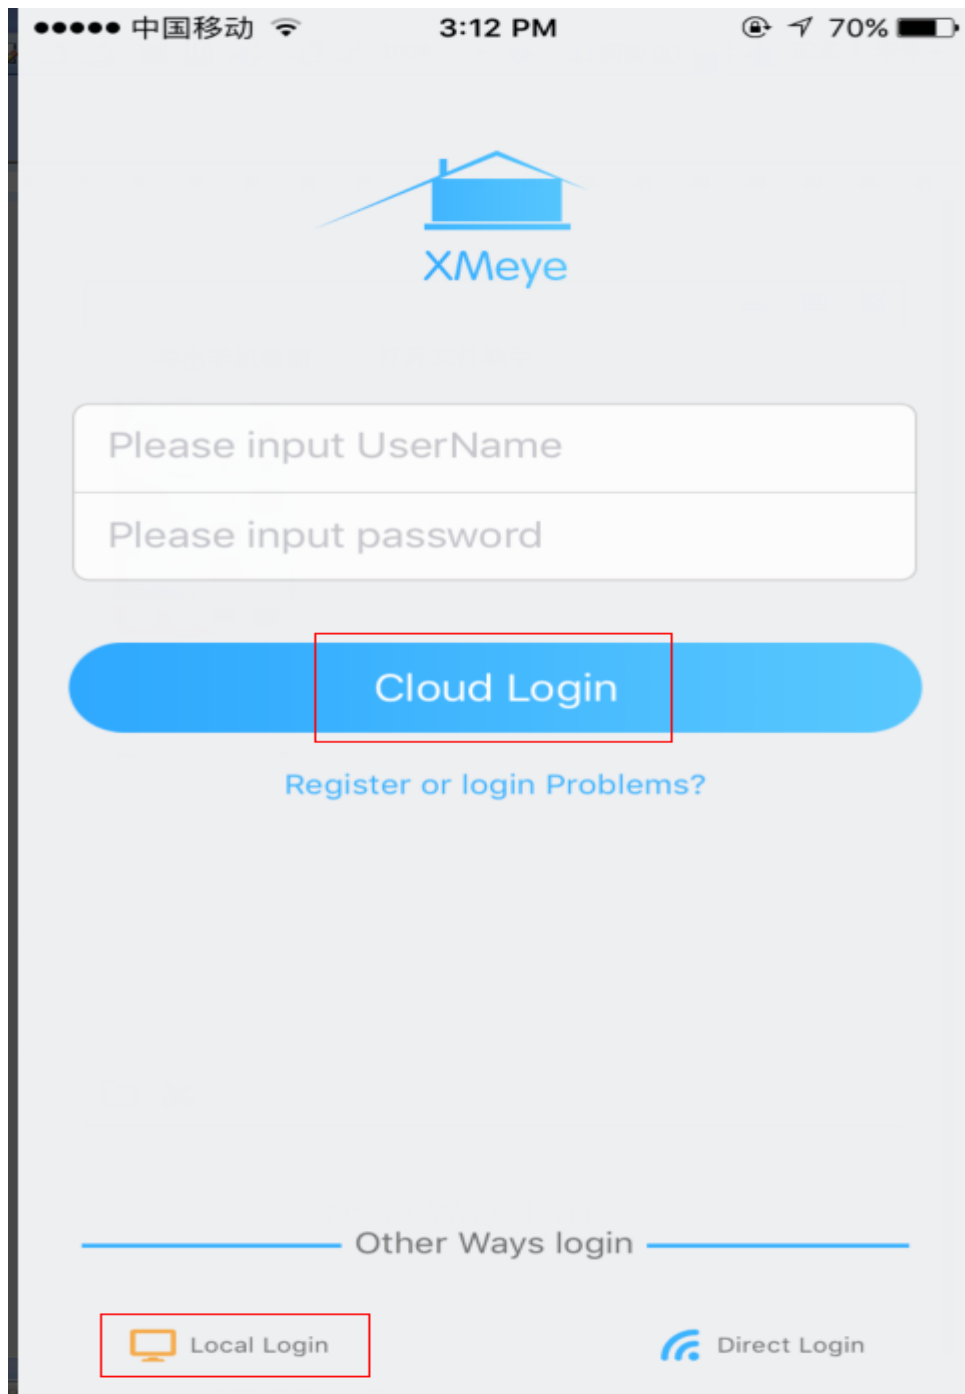


4. After go with XMEYE, click Add device (top right corner '+')

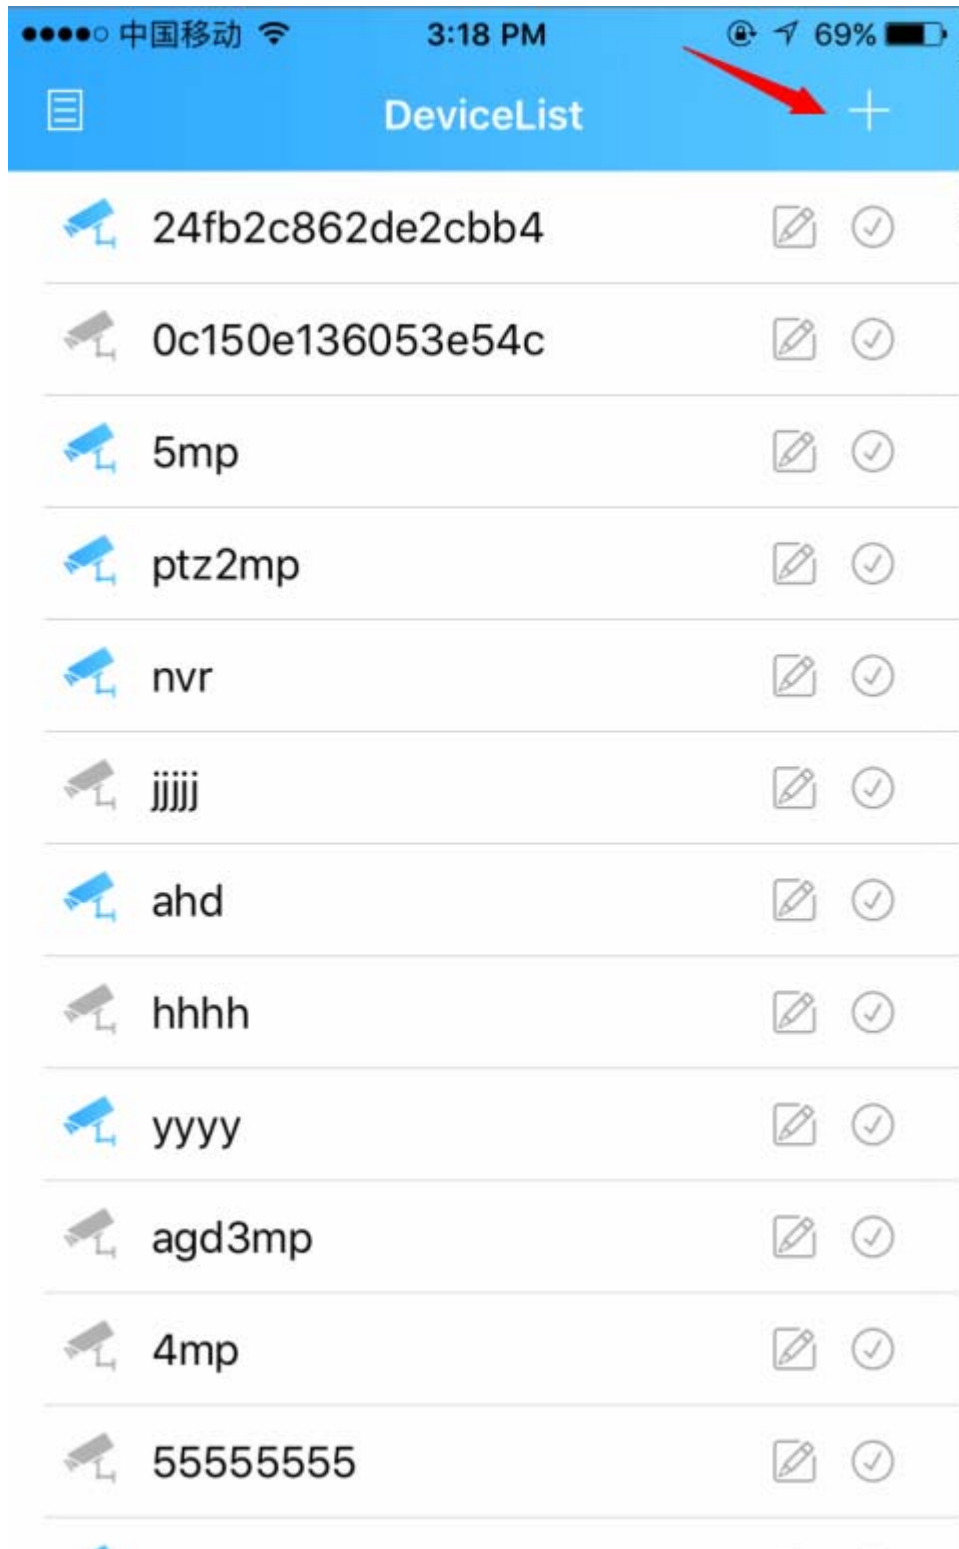

5. Under the Add Device option, select the WIFI configuration option




6. Mobile phone connected to the wireless router signal which is the camera to be configured router, confirm the the network you need to configuration, then enter the wifi password, ensure both indicator light and device operation to be done,(the default mode is mobile phone configuration mode)

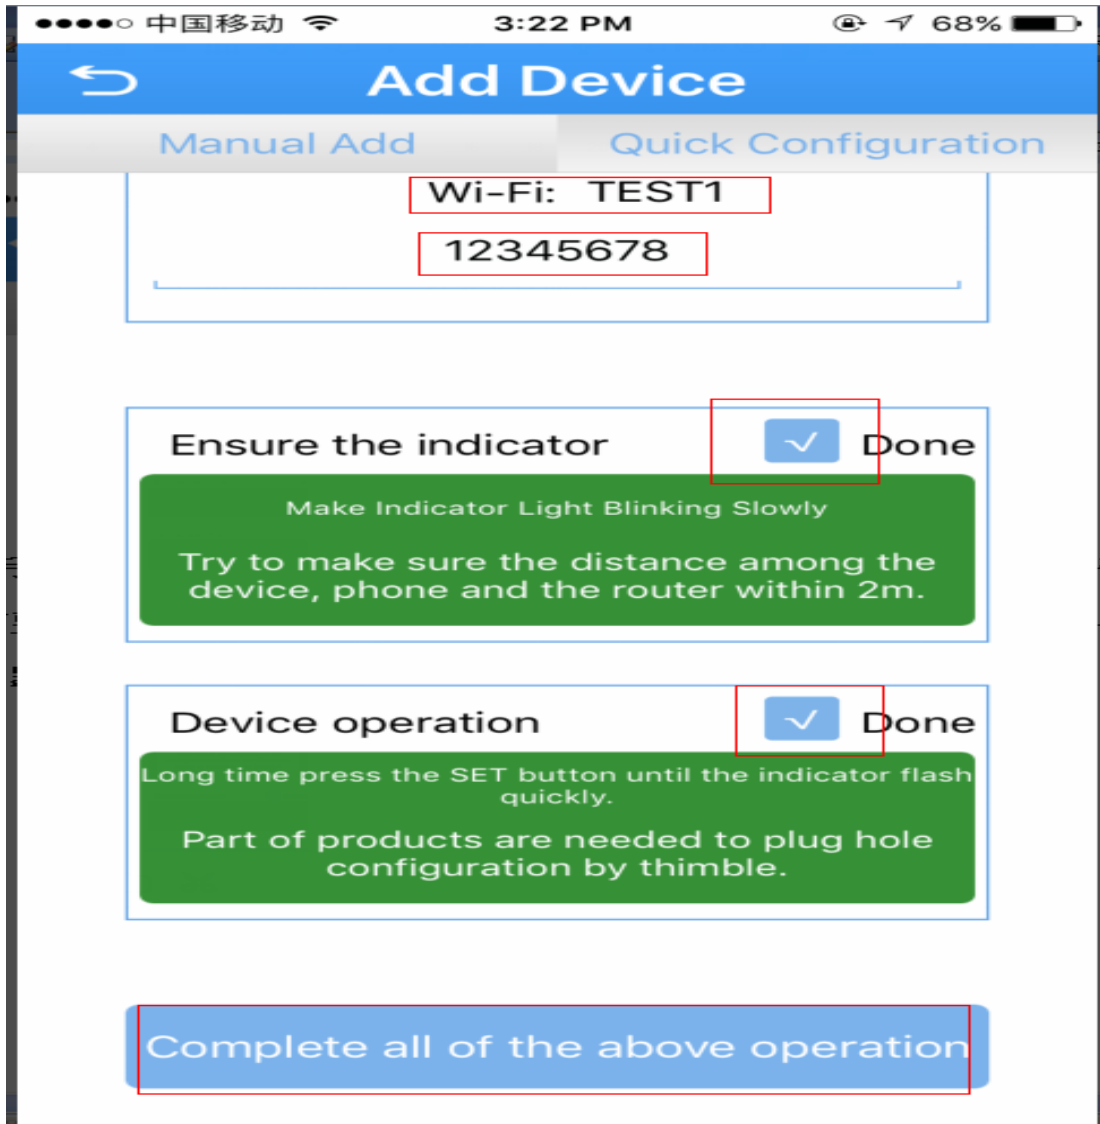


Complete all of the above operation

7. Click option, go to the configuration interface

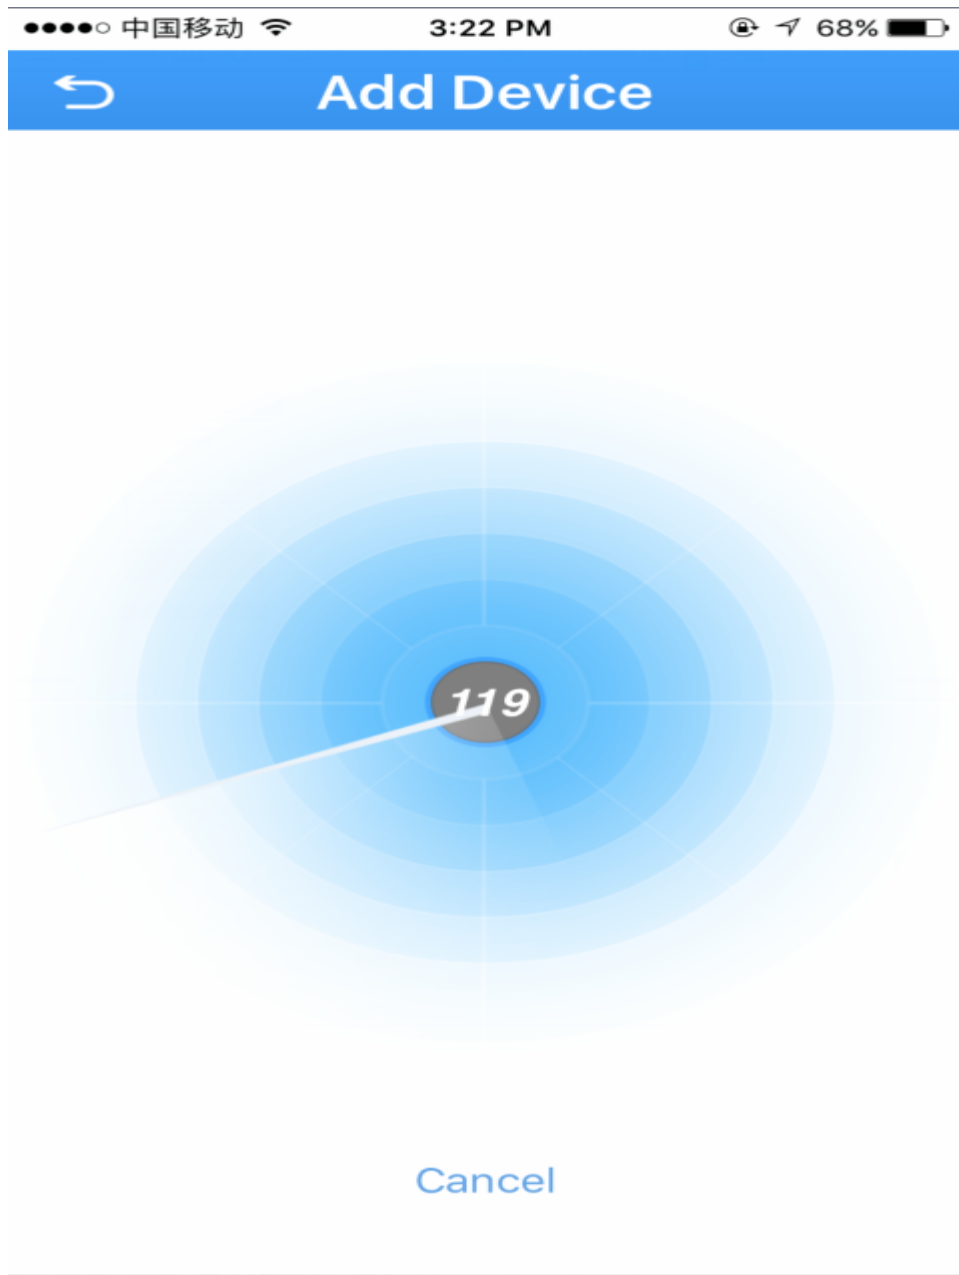

8. Wait around 10 Second will search for a green camera icon, camera configurate wifi successfully

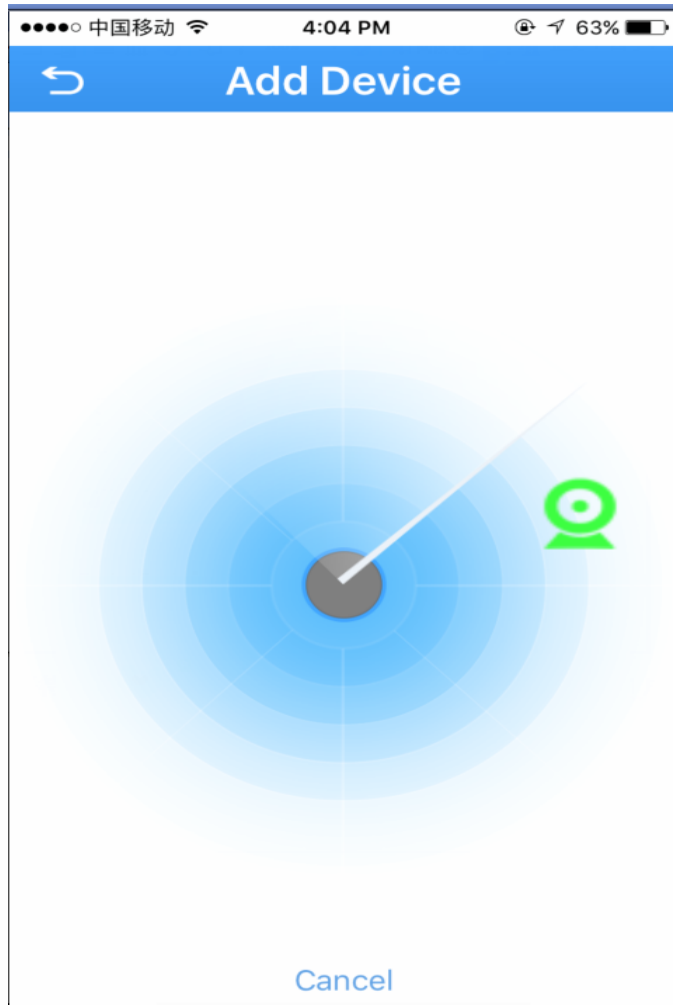


9. Click the green camera icon to enter the device information interface, the device name can be modified, ID option is displayed as the device ID, the default user name is admin, the default password is no password, and then click OK to add the device.

中国移动 4:04 PM 63%

Add Device

Manual Add Quick Configuration

Device Name 2c404023685b359a


ID 2c404023685b359a 

Username admin


Password

Input Http Port(Optional)

OK Cancel



10. Select the device which you added to start review

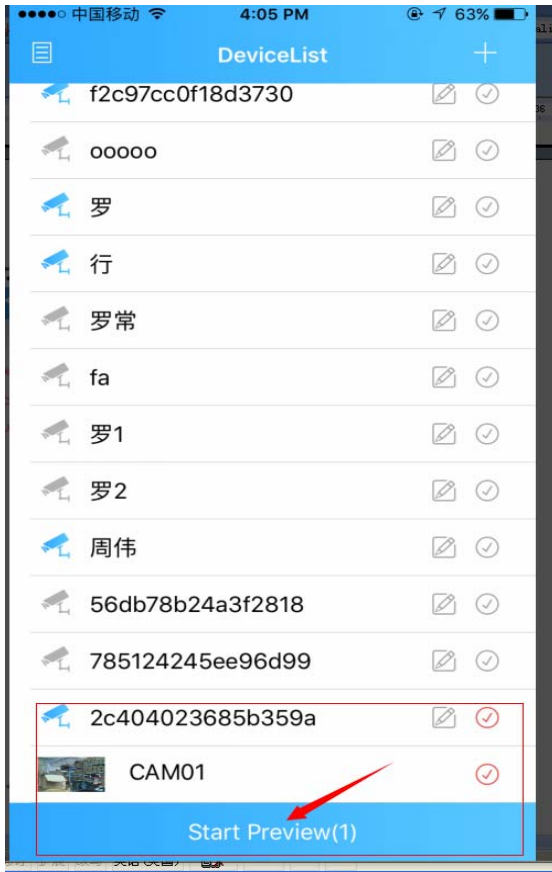


Configuration WIFI mode by wired cable


1. The camera connected to the power and network cable, and then press the key 3 times to switch WIFI configuration mode to direct mode (each time press around 1second)




2. Go through IE to enter the camera, the default IP address: 192.168.1.10 (can be modified by tools or manually), in the camera device configuration – system configuration-network services to find wifi option

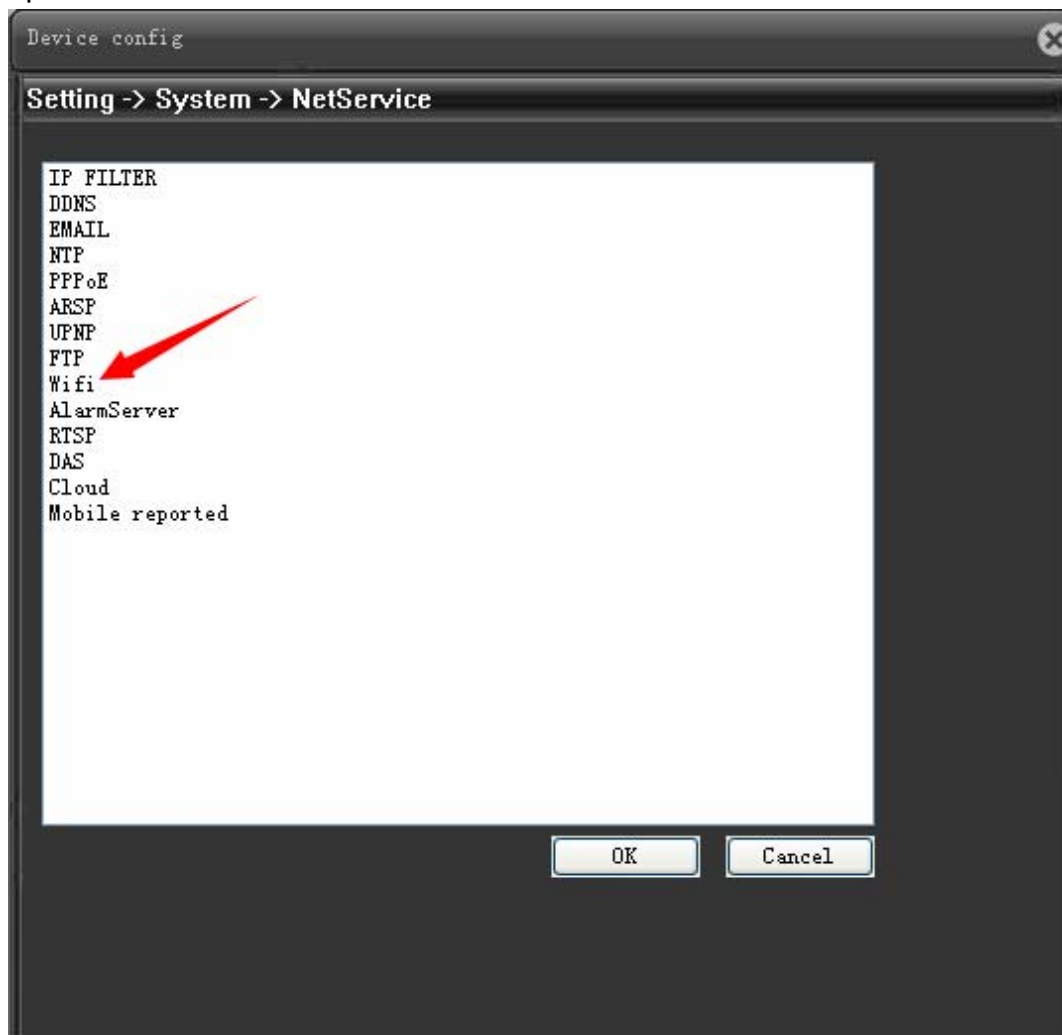

3. In the wifi configuration interface enabled wifi function, and then click on the search, you can search for the nearby wifi signal, select the configuration of the wifi name, enter the wifi password below; the IP address of the WIFI configuration interface is the address of the device after the wifi is configured (the address You can modify), LAN view use this address,set up completed and click OK to save

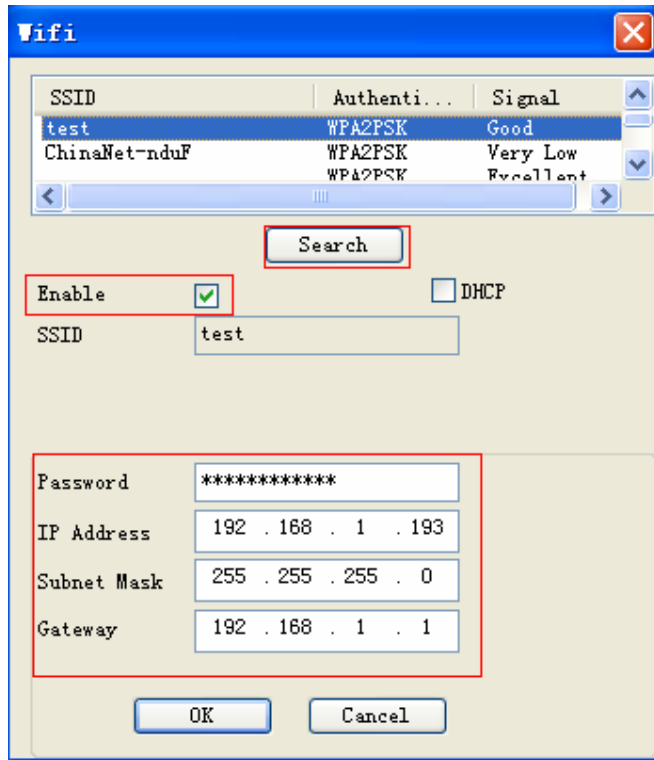

4. Wifi set interface click OK will return to the network service interface after save, in the network service interface right bottom also click OK to save

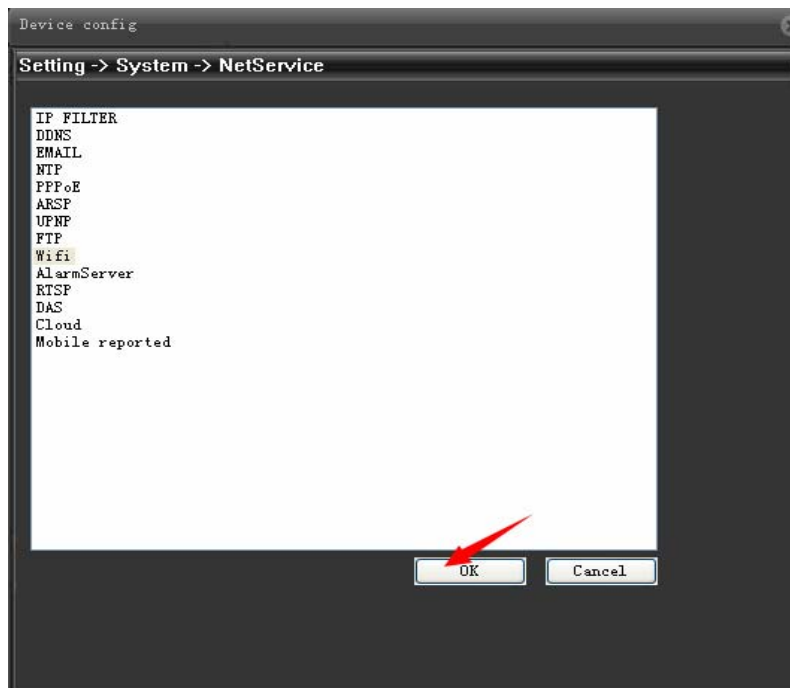

5. Unplug the cable after configuration and wait about 30S can be added to view