

Mobile Client User Manual

-----iHDEye APP

Directory

1.Introduction.....	1
2. Getting Started	1
3.Add / Edit / Delete Device.....	2
3.1 Add Device.....	2
3.2 Edit/Delete Device	5
4.Live View	6
4.1 Panel button description.....	6
4.2 PTZ Control	8
5.Remote record played	8
6.Local picture and record	9
7.local settings.....	11
8.Help and Feedback.....	13
8.1 Help	14
8.2 Feedback	15
8.3Version	15

1.Introduction

This application can be easily users to watch, manage IP Camera (IP cameras) and DVR (DVR) online video streaming. Features include:

- 1, watch streaming video over 3G or WIFI network
- 2, support multi-window video playback (maximum achievable 4 viewing)
- 3, enabling users to add editing equipment
- 4, support for capture and video capture Browse
- 5, support for video recording and viewing video
- 6, support for video search
- 7, support PTZ control
- 8, support for two-dimensional code scanning equipment added
- 9, adding support for LAN devices
- 10, supports manual input devices
- 11, support system settings and device management
- 12, supports two-way voice intercom


Our software allows customers under normal network environment for remote real-time mobile video surveillance, to maximize the protection of property security customers.

2.Getting Started

1, make sure the camera is connected to a network connection

2, the mobile is connected to the corresponding 3G/WIFI network,


run the application, enter the main interface. As shown:

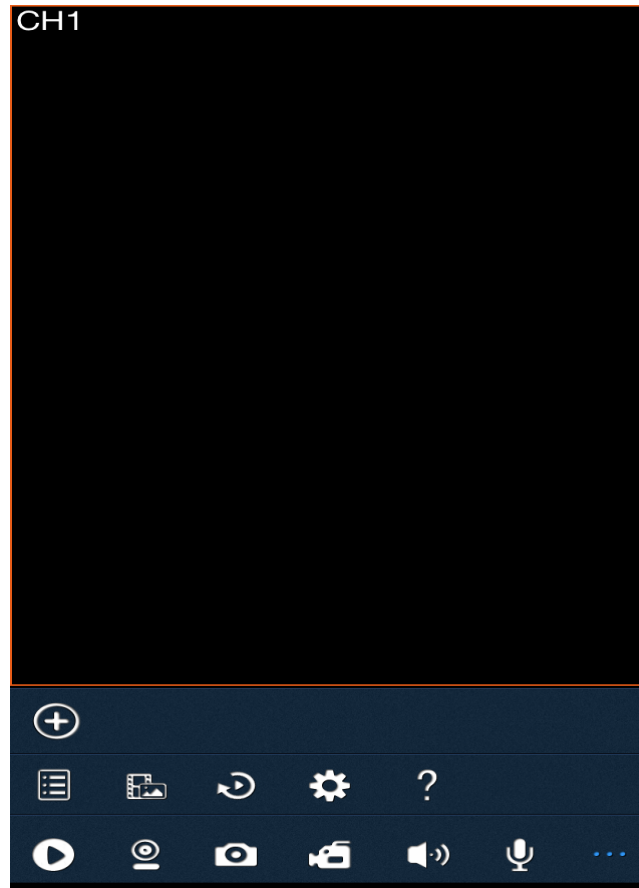

3.Add / Edit / Delete Device

3.1 Add Device

Click the icon  to pop-up "option to add the type" box. As shown:

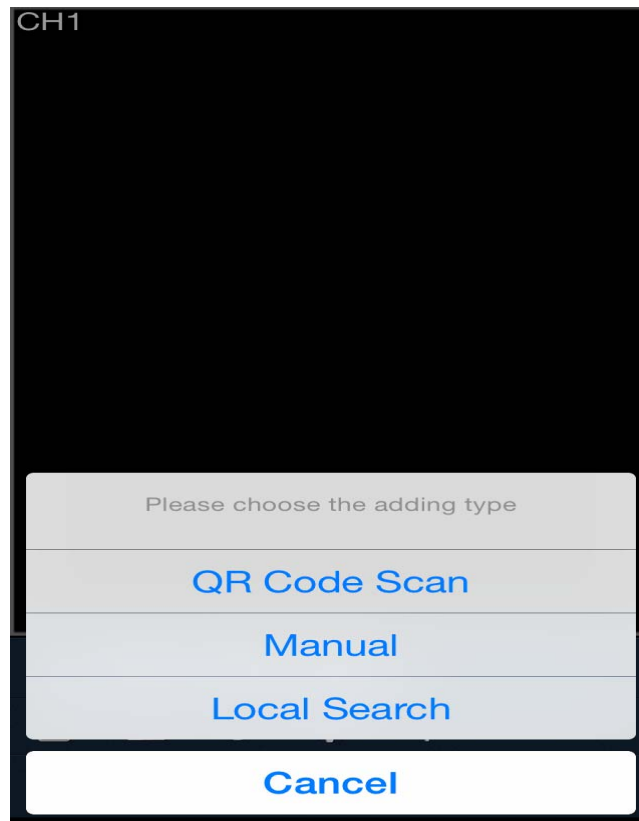

Button Options	Descriptions
QR Code Scan	Scan the QR code on your device to fill in the UID string,
Manual	Fill in the login info manually,
Local Search	If your devices are on the same local network with your phone, client would find them and let you add those devices easily

All of the 3 adding methods above will lead you into the Device edit panel:

Back Add Device Done


Name:

GID:




User:


Password:

Channel Number

Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
GID	The device GID,(if you are using the QR Code Scan/ Local Search method to add device, this item will be fill automatically)
User	Device user name
Password	Device password
Channel Number	Select the channel number, when assign  , the app will set the number automatically.


3.2 Edit/Delete Device

click  to spread out the buttons. Then tap  to open the Device list, choose a device, click  button in the upper-right corner. You can modify device login information in this view. And at the bottom of this view, you can delete the device by click the red button .

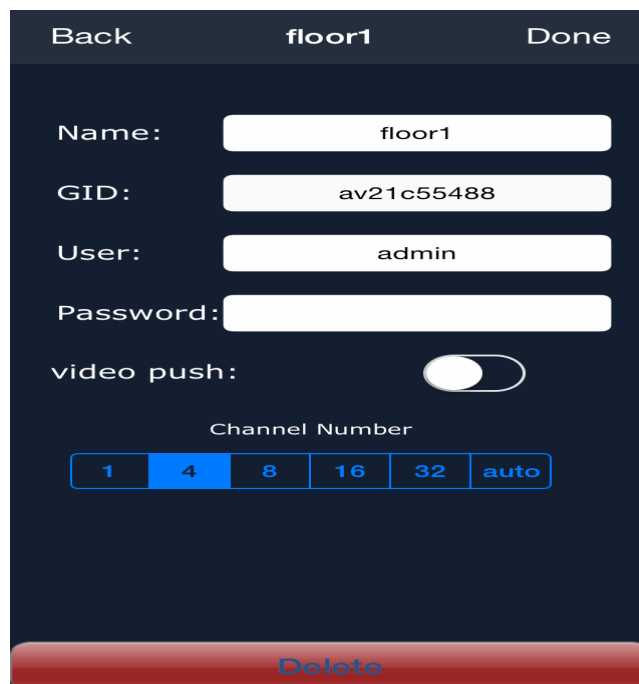





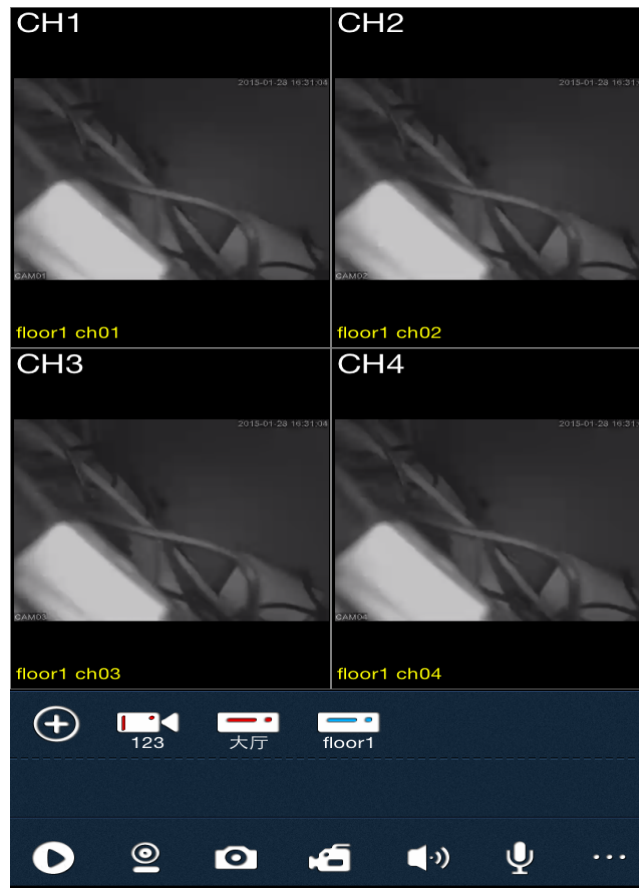











4.Live View







Click the Device icon, open all the channel video defaulted. Click again, close all the channel video.double click one channel, switch to one channel playing. Double click again, back to multiple channels.




4.1 Panel button description

按键图标	按键功能
	Play

	Add device
	 PTZ: up
	 PTZ: down
	 PTZ: right
	 PTZ: left
	 Zoom in
	 Zoom out
	 Focus Add
	 Focus Minus
	 Iris Add
	 Iris Minus
	Snapshot
	Start/Stop Record
	Audio


		Talkback
...		Device List
		Snapshot and Record files
		Remote Record playback
		Local settings
		User guide


4.2 PTZ Control

Click  to open the PTZ Control panel. Slide to show more PTZ control button; to hide the panel, you can either click the button again or click any video window.





5. Remote record played

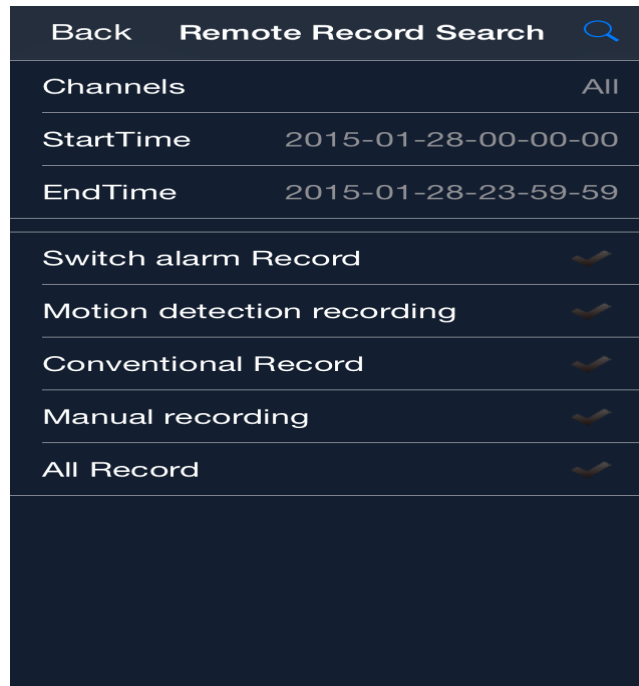
Click  to enter the Remote Record Search.



Set the parameters to search file.

6. Local picture and record

Click , choose  to search and play local file.

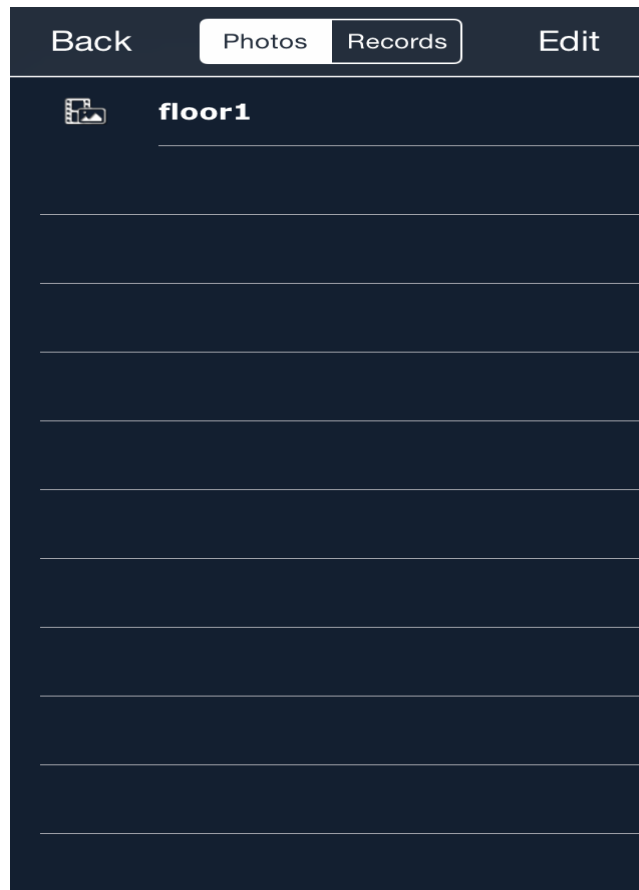

Delete local file


Click button “Edit” to delete local file.


Save to photo album







open local file, click “save to photo album”, it will save the file to your phone photo album.

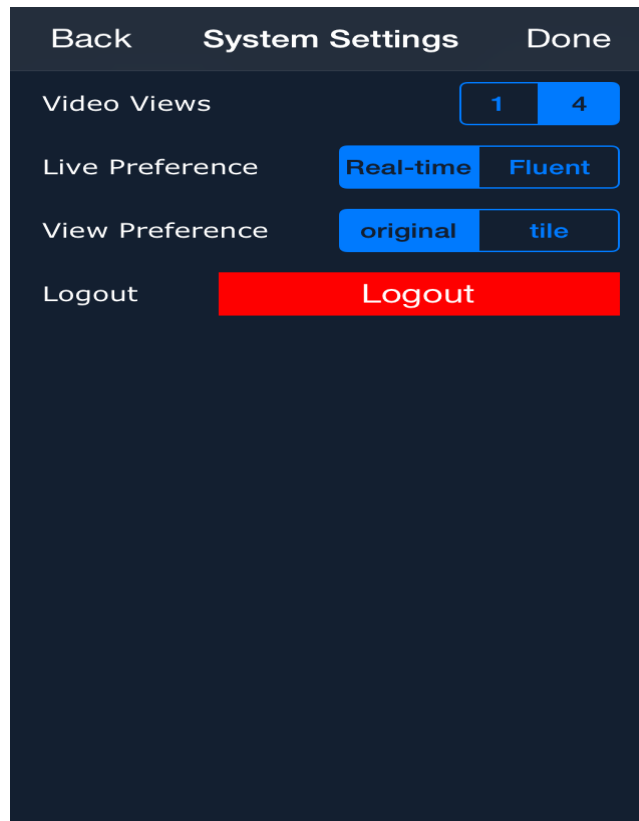


7.local settings


Click the icon  to enter the settings page:



Video Views		One window display
		Four windows display
Live Preference		Real-time: no buffering, which means there is minimum delay of the video display and video fluency may be suffered;
		fluent: buffering enabled, the video will be more fluent in this mode;
View Preference		According to the original proportion to watch the video
		Drawing picture ratio to watch the video


8.Help and Feedback

Click  for help and feedback interface

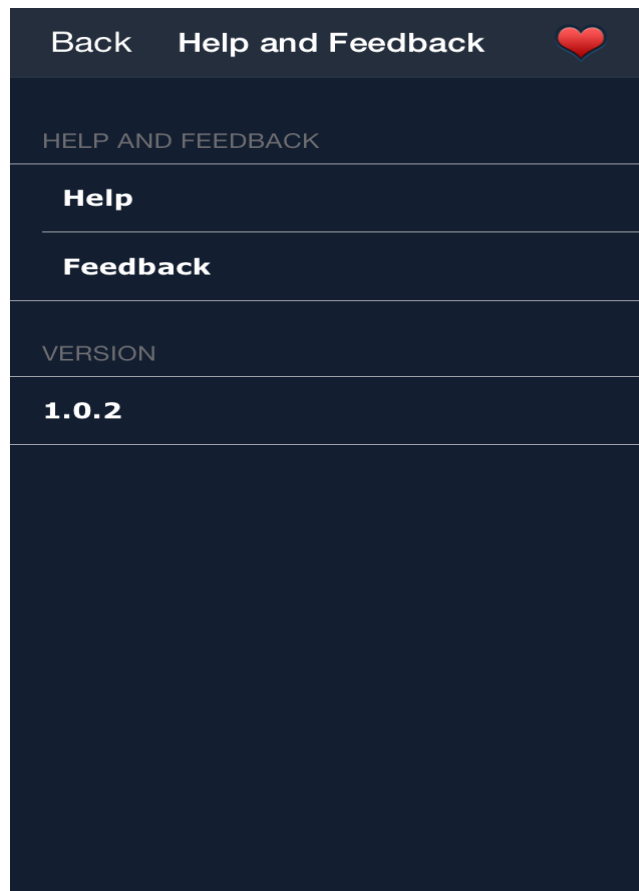


8.1 Help

enter “help” interface to seek for some operating information.

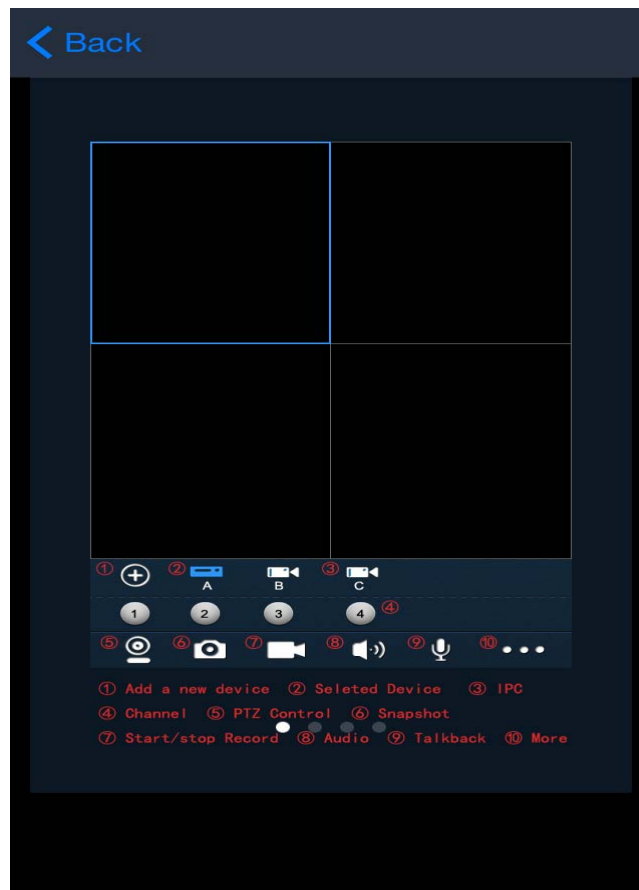

8.2 Feedback

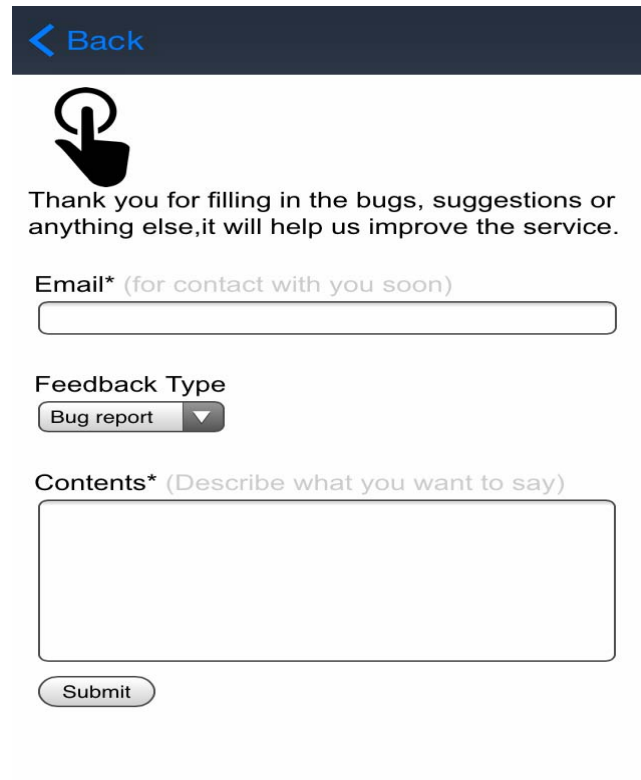

The feedback form is displayed on a dark blue background. At the top left, there is a back arrow and the text '< Back'. Below this is a circular icon with a hand cursor pointing to it. The text 'Thank you for filling in the bugs, suggestions or anything else, it will help us improve the service.' is centered. The form includes an 'Email*' field with a placeholder '(for contact with you soon)', a 'Feedback Type' dropdown menu currently set to 'Bug report', and a large 'Contents*' text area with a placeholder '(Describe what you want to say)'. A 'Submit' button is located at the bottom of the form.

8.3 Version

The current version is the version number of the software used

